


FIG.1

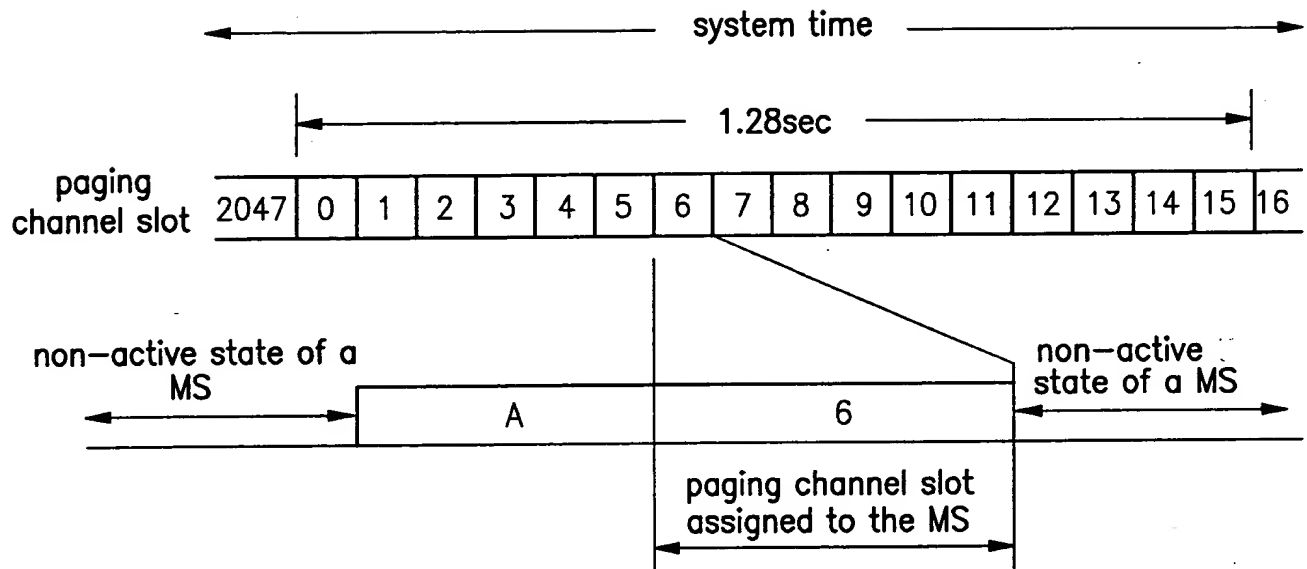

A:Reacquisition of CDMA system
 B:Mobile station's Assigned paging channel slot

FIG.2

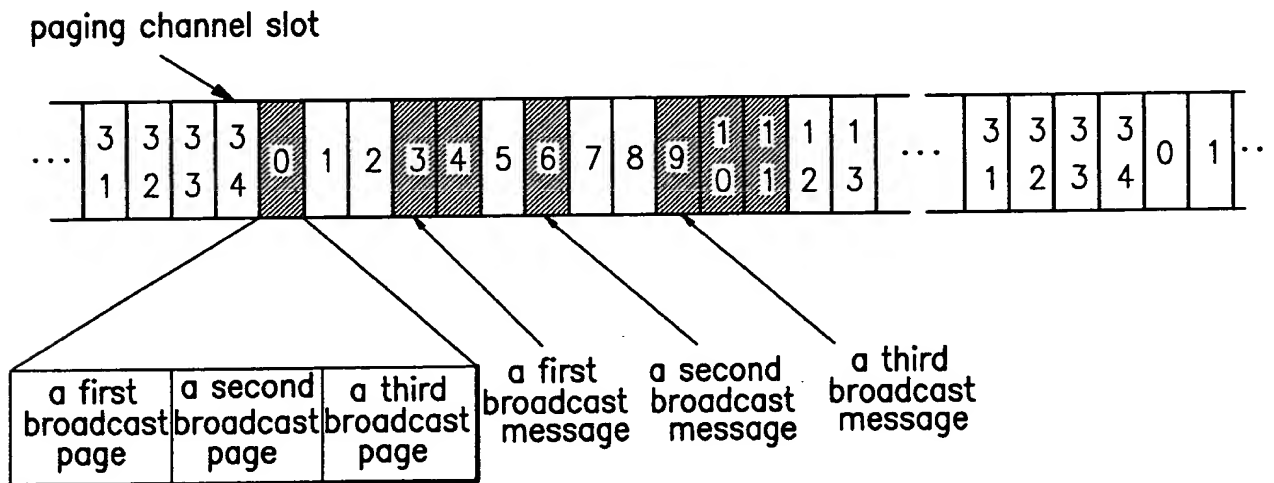


FIG.3

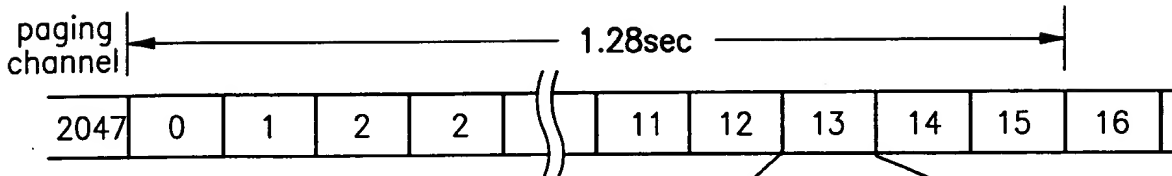


FIG.4

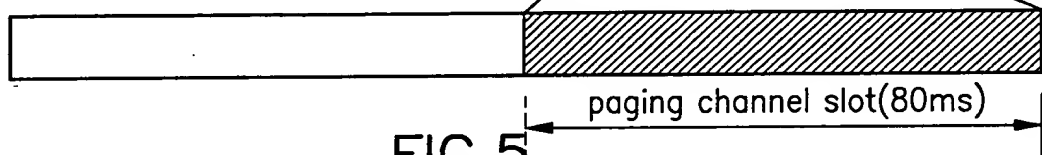


FIG.5


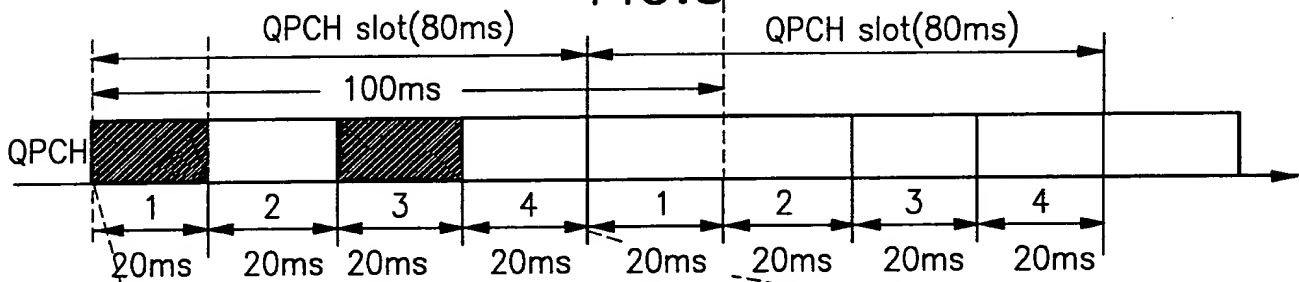



FIG.6

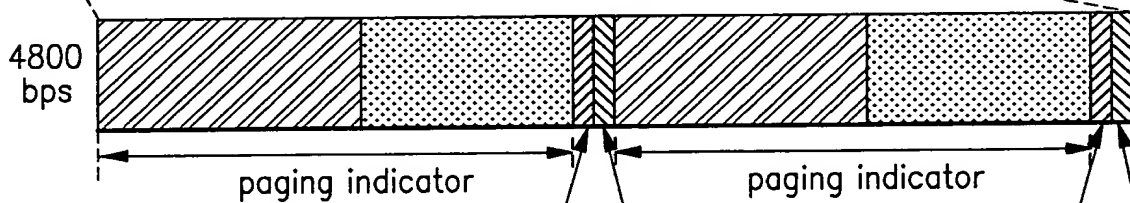

broadcast indicator(2 bit)
configuration change indicator(2 bit)

broadcast indicator(2 bit)
configuration change indicator(2 bit)

FIG.7

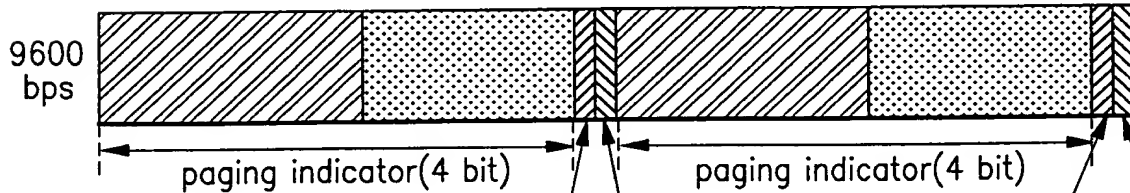

broadcast indicator(4 bit)
configuration change indicator(4 bit)

broadcast indicator(4 bit)
configuration change indicator(4 bit)

FIG.8

FIELD	LENGTH
TMSI_ZONE	8 TMSI_ZONE_LEN
BCAST_INDEX	3
IMSI_T_SUPPORTED	1

⋮

QPCH_SUPPORTED	1
NUM_QPCH	0 or 2
QPCH_RACH	0 or 1
QPCH_POWER_LEVEL_PAGE	0 or 3
QPCH_CCI_SUPPORTED	0 or 1
QPCH_BI_SUPPORTED	0 or 1
QPCH_POWER_LEVEL_CONFIG	0 or 2

⋮

